



**ALSEAL**

Stick to Aseal's Quality




Aluminium Composite Panel

Fire Compartment Joints



Fire floors

Fire walls

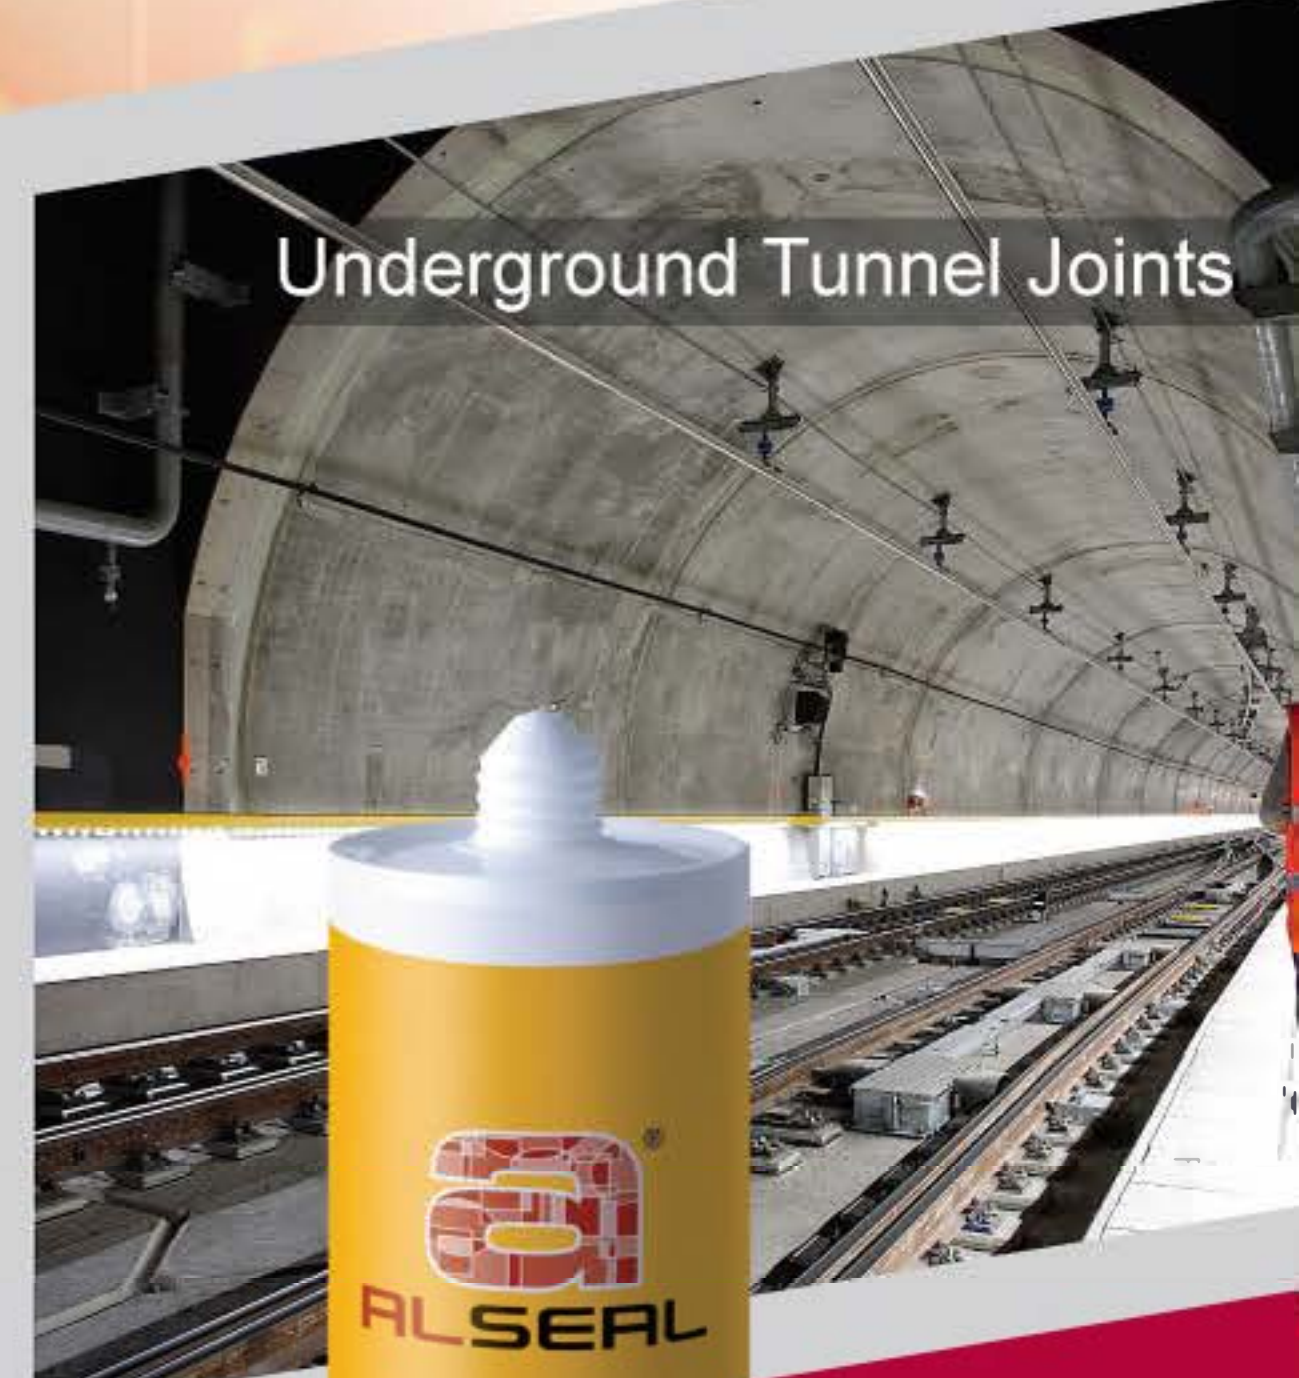

Underground Tunnel Joints



## AS-202 Fire Retardant Silicone Sealant

ALSEAL Fire Retardant Silicone Sealant is a single-component, gun-grade, ready-to-use neutral silicone sealant formulated to form an elastomeric fire retardant seal in construction applications. It helps control the spread of fire, smoke and toxic fumes within a given area surrounded by firewalls for a period of up to four hours, depending on joint configuration.

### Applications:

Recommended for firestop sealing of interior and exterior building and construction movement joints or openings, where a fire rating of up to 4 hours is required. In addition, it is used in mechanical, electrical, and plumbing applications like sealing openings or metallic service penetrations through fire-rated ceiling, floor, or wall.

**Available colours:** Matte grey & matte black

### Features:

- ✓ Fire rating up to 4 hours (BS EN 1366-4: 2006)
- ✓ ASTM C920 compliant (±50% movement capability)
- ✓ Excellent weather and UV resistance
- ✓ Excellent adhesion to most substrates
- ✓ Matte finish

Product Code	Content	Carton Quantity
AS-202	300 ml / Cartridge	24 / Carton